

Introduction

The N-Squared Advanced Call Distribution (N2ACD¹) software product is a comprehensive freephone/premium number call-control solution for network operators in both NGN SIP and PSTN INAP/CAMEL networks.

N2ACD enables both operators and self-managing customers to design, deploy, schedule, and report on call control flows for service numbers. The user-friendly N2ACD Flow Editor provides safe, guided visual design of standard call control features. The Administration GUI provides a pure-web service management GUI for access and configuration control.

For esoteric one-off services and for operator-specific and management functions, a sandboxed Lua scripting environment is also provided.

The system supports authentication and authorization via OAuth providers such as AzureAD or Keycloak, or alternatively via MS ActiveDirectory or LDAP. The extensible reporting framework provides built-in and site-local reports for system administrators and end-users.

Product Integration

When integrated with the N-Squared Simple Number Services (N2SNS²) product, N2ACD gains freephone number portability, to either process in-network calls or redirect out-of-network tollfree calls to the appropriate other owning operator.

For IVR interaction, N2ACD may be integrated with one or more Specialized Resource Function (SRF) nodes, including the SIP-trunked N-Squared Service Resource Platform (N2SRP³).

Call Control Flow Editor

The N2ACD Flow Editor is a fully web-enabled voice call control flow design tool.

Within the Flow Editor, users can design how a freephone call will be routed, using inputs such as caller location, the current date/ time, speed dials, "Follow Me" and many other service features.

When integrated with an external SRF, the Flow Editor supports user interaction via announcements and digit collection for menus and other user input such as postcodes, PINs, extension numbers, etc.

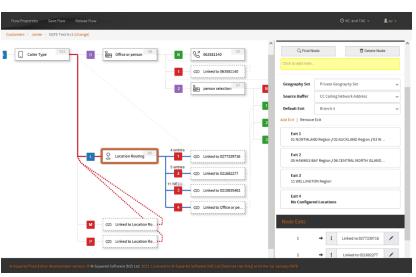


Figure 1: Example call-control flow being edited

¹ https://nsquared.nz/product/n2acd.html

² https://nsquared.nz/product/n2sns.html

³ https://nsquared.nz/product/n2srp.html



Service Configuration

The N2ACD Flow Editor & Administration GUI together allow Telco staff, wholesalers/resellers, and self-managing customers to manage their own BAU activities, for:

- Service number ownership, customer hierarchy.
- Flow design, assignment, and scheduling.
- Geography definitions for location routing, including postcode-level mapping.
- Holiday definitions for day-of-year routing.
- Speed dial tables, account codes, and "Follow Me" numbers.
- Barred/allowed number lists and special number handling.
- Announcement, DTMF menus, and digit collection features.

The N2ACD Flow Editor may be deployed with customized branding, allowing operators to white-label for individual wholesalers' operational platforms.

mer Search > 0100 N Squared Schware >	08001234967 >										
mmary	<	Derticas	1 km	Americanata	Ceography	Fallshow	Speed Dark	Account Codes	Hashidan Tale	Internation Number Hang	Al lerene
r M-Squared Software	\$	Services								٥	+ No
Colorer Inte Provider(Service Provider	00 - N	Digitiz 1	Active Fig		Scheduled Since		Change U	www.	Change Dat		
aarod Sortware		139723485/					ution		2825-05-16 137	NE 38	1
end Sethere kolles zakerer.		Receive) of search for any	hi ne dan						Dec.	scorpage 18 1+1 of 1	$\langle \rangle$
ne normalization operationalistication nervalistication nervalistication	• 00 • •										
nge (Zeoling n Seatale Se											
oga (2 positio) - Strandar Ion - Rec Griffiel Seritera Danher - Materiala Territoriales Nationales Acta	• •										
up Oberley Instantion for Instantion for Instantion Dealer Densis Dealer Den	• •										
oper Chandrales - Transister Same Instrument Cale Same Instrument Cale Same Sa	• •										

Figure 2: Customer management GUI

Login and access can be via external authentication and authorization server, e.g. LDAP, OAuth, or Active Directory.

The flexible hierarchical customer definition structure allows telcos and wholesalers to manage their own customers, but also allows for customers to be granted the right to (partly or fully) self-manage.

Flexible Deployment Architecture

N2ACD can be deployed on-site in a Linux VM environment, or as a cloud-based virtualized solution.

N2ACD runtime service nodes can be freely deployed as a N+1, N+2, 2N, etc. The configuration may include geographically and/or logically redundant node groups with each service node operating independently against a full local database replicated from the primary SMS.

The N2ACD management node with its administration GUI may be deployed with a co-located database on a single node, or with its database functions split off into a separate database environment. This gives the operator flexibility in their preferred database management paradigm.

The underlying PostgreSQL database is deployed as a primary node with PostgreSQL replica sets, allowing N2ACD management operations to be executed with multiple layers of redundancy across each node function. This provides full hot standby in this case of disaster.

For front-facing access, the N2ACD Flow Editor may be deployed co-located on the SMS node, or segregated into a DMZ or cloud-hosting as fits the Telco operator's existing security strategy.

Figure 3 shows a typical N2ACD with hot-standby management node and all-active service nodes. This deployment is designed for Tier One uptime, with geography redundancy for disaster recovery:

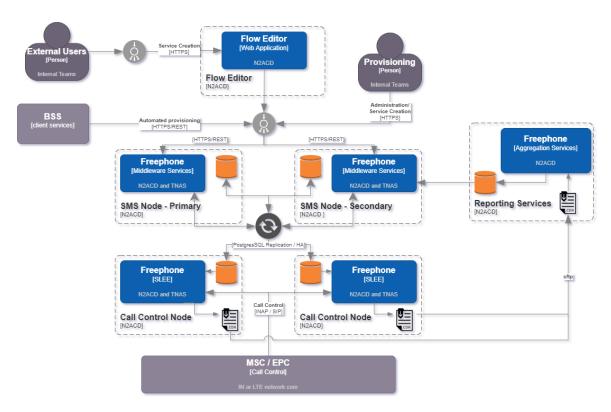


Figure 3 - N2ACD Architecture (HA deployment model)

Dashboard, Reports & CDRs

Accel Reporting Databased Name				
Out of the out	ACD Reporting	Dashboard (******) *		
Non-Admitted Values Non-Admited Values	40 			
NATION Address Factor	0 23 2023	5 5 15 17 18 18 1 (22 Peb Minum 0	
Abs/ D D 101 0 100 0 202 0 1000000000000000000000000000000000000	w Data Analysis	* 1 <u>5</u> 0 2 2 1	22 Peb Minum 0	
NUL U U STR MM-1004000 ADDENTIFIANT MARCED ADDENTIFIANT STR MM-100400 ADDENTIFIANT MARCED ADDENTIFIANT STR MM-1004000000000000000000000000000000000	20 2003			
XIII THI-15/44/2016-82/18/T101644 THI-15/44/2016-82/18/T101644 XIII 100 THI/15/44/2016 THI/11/44/2016 XIII 100 THI/15/44/2016 THI/11/44/2016 XIII 100 THI/11/44/2016 THI/11/44/2016	20 2023	1000-007-	2 An and a set of the	Ingester
XEDA IPSU T3 V # 4 Go (a)/CRETCO FeAG DEMONSTRAT From 3 July XEDA IPSU T3 V # 4 Go (a)/CRETCO FeAG DEMONSTRAT From 3 July	29 2003			
2535 PR0 - 12 A VE ASCO (AN TODS (AN TODS (AN E)) 1 (A VE ASCO) (A	20 2020 w Data Analysis Innoucement Usage fare (12 -) erato tares :			
	29 3003	NAMES AND T		
	20 3003	NAME, VE F	20 Am 120 Maxwell	
alan iku ku wa ku ba awa ku ku ba	2 2003		20 Annu Annu Annu 100 Annu Annu Annu	
	2 2003			
	2 2003	extensions to the second secon		
	2 2003			

Figure 4 - Example dashboard

N2ACD includes a configurable dashboard which provides a single point of access to statistics, reports, and call/event data records (CDRs and EDRs).

Telco staff, resellers, and authorized selfmanaging customers can view their own call logs, announcement playback statistics, flow node usage, etc.

The text-format CDRs provide deeper insight into traffic patterns. These can be downloaded for more detailed off-line analysis.



OSS & BSS

The N2ACD service presents a comprehensive HTTP REST API for integration with BSS middleware endpoints. Customer, service number, and flow creation can be integrated with 3rd party systems such as existing CRM and portal environments for the provisioning and management of freephone services.

Custom Flow Scripts

The N2ACD Flow Editor provides support for the vast majority of toll-free and premium-number innetwork call distribution control flows.

However, for those unusual scenarios, N2ACD provides mechanisms for freeform, hand-designed flows written in the Lua scripting language, using N2ACD's documented call control API.

Typical uses are:

- Custom one-off flows, or
- Globally defined, operator-specific pre-call screening logic, or
- Globally defined, operator-specific number portability processing, or
- Globally defined, operator-specific tariff features, e.g. using FCI or SCI.

To support these custom flows, the GUI can be configurably enhanced with arbitrary custom profile fields associated with some, or all customers.

Run-Time Framework

N2ACD is built on N-Squared's proven N2SVCD⁴ platform. N2SVCD runs as an IN SLEE/SIP-AS environment. The operational web GUI provides:

- Real-time node management
- Dynamic tracing hooks.
- Statistics and activity.

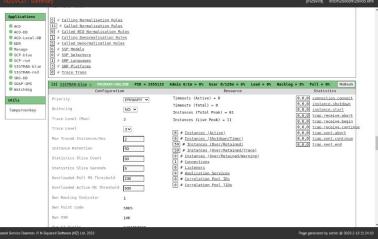


Figure 5 - The N2SVCD operational management GUI

Protocol Conformance

For protocol compatibility statements applicable to the SIP and the INAP/CAMEL implementations of N2ACD, please refer to the separate Protocol Conformance Specification documents:

- N-Squared N2SIP SIP-SDP-RTP PCS 2022-02 (or later)
- N-Squared N2SCP CAMEL-INAP PCS 2022-03 (or later)
- N-Squared N2SVCD SIGTRAN-TCAP PCS 2021-03 (or later)

⁴ https://www.nsquared.co.nz/files/n2svcd/technical_guide/